



Thermal resistance


Parameter

Symbol



Fig.1 Gate-Charge Characteristics


Fig.2 Capacitance Characteristics

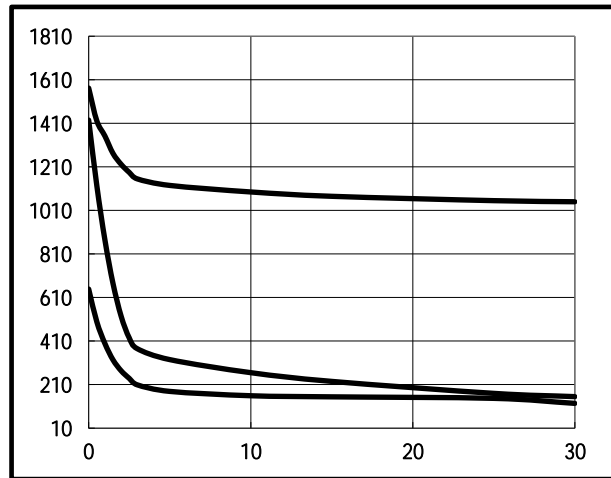



(SOT23)

Unit mm

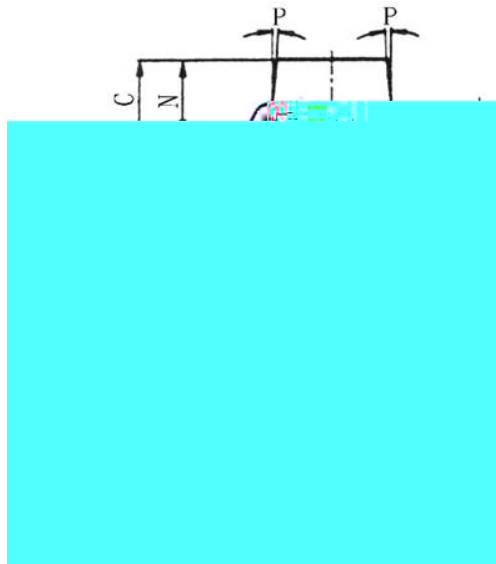

SYMBOL	min	nom	max
A	2.70	2.9	3.10
B	1.15	1.3	1.50
C			1.30
D	0.35	0.4	0.55
E	2.20	2.4	2.70
G	1.70	1.9	2.10
H	0.85	0.95	1.05
J	0.05	0.10	0.20
K	0.00		0.10
L	0.45	0.55	0.65



M	0.20		
N	0.90	1.00	1.20
P		7°	